

# CARRÉ VERTICAL (CPVN2-ZB)



### TYPES

- Two rows (CPVN2-ZB) of tubes

### TUBES

- Vertical, square 25 x 25 mm

### COLLECTORS

- Horizontal, round Ø 35 mm

### COLOURS

- Standard colour white RAL 9016
- Not available in colour Gloss White
- Extensive colour chart see p. 16

### BRACKETS

- Wall brackets standard
- CPVN2-ZB also available as free-standing radiator, see p. 88

### TECHNICAL

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

### ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

### TECHNICAL DRAWINGS

- See p. 90

### CONNECTION


- ✓ One-point connection for one-pipe system (order as special radiator) (see p. 301)
- ✓ One-point connection for two-pipe system (order as special radiator) (see p. 301)
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve

## ABOUT CARRÉ VERTICAL


### Top design with double heat capacity

The sleek, smooth look of the Carré Plus, which has a double row of pipes for maximum heat output. The Carré Vertical designer radiator continues to be its timeless, functional self, but the extra capacity ensures optimum efficiency, even in larger spaces.

### RECOMMENDED CONNECTION (1188)



### Other connection methods, see p. 89



ref. nr. 118210300000099  
Fittings, see p. 313

### RECOMMENDED FOR THE BATHROOM IN OPTION




towel rail straight (chrome)  
ref. nr. 118320700000099

### Other accessories, see p. 88



### HOW TO ORDER CARRÉ VERTICAL

Delivery time 15 - 30 working days  
(transport duration not included)

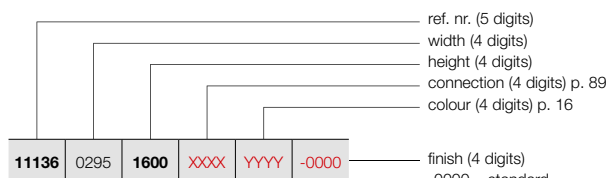


### FREE-STANDING INSTALLATION (CPVN2-ZB)

See p. 88 for additional accessories.

### HOW TO ORDER STOCK RADIATOR CARRÉ VERTICAL

Delivery time 5 working days  
(transport duration not included)



## CARRÉ VERTICAL (CPVN2-ZB)




CPVN2-ZB

REFERENCE CODE CUSTOM MADE CARRÉ VERTICAL						TECHNICAL DATA						short ref. nr. RAL 9016 stock			
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.		weight (kg)	water content (l)	electr. resistance (Watt)
<b>REF. NR. CARRÉ VERTICAL CPVN2-ZB : 11136</b>															
<b>11136</b>	0295	<b>1600</b>	XXXX	YYYY	-0000	10	295	1600	1062	533	1,35	30,20	15,80	-	-
		<b>1800</b>				10	295	1800	1174	589	1,35	33,80	17,90	-	-
		<b>2000</b>				10	295	2000	1279	642	1,35	37,30	20,10	-	-
		<b>2200</b>				10	295	2200	1377	691	1,35	40,60	21,30	-	-
		<b>2400</b>				10	295	2400	1469	737	1,35	43,80	22,60	-	-
		<b>2600</b>				10	295	2600	1555	780	1,35	47,10	23,90	-	-
		<b>2800</b>				10	295	2800	1635	820	1,35	50,30	25,10	-	-
		<b>3000</b>				10	295	3000	1709	858	1,35	53,60	26,40	-	-
<b>11136</b>	0355	<b>1600</b>	XXXX	YYYY	-0000	12	355	1600	1275	640	1,35	36,24	18,96	-	-
		<b>1800</b>				12	355	1800	1409	707	1,35	40,56	21,48	-	-
		<b>2000</b>				12	355	2000	1534	770	1,35	44,76	24,12	-	-
		<b>2200</b>				12	355	2200	1652	829	1,35	48,72	25,56	-	-
		<b>2400</b>				12	355	2400	1763	885	1,35	52,56	27,12	-	-
		<b>2600</b>				12	355	2600	1866	936	1,35	56,52	28,68	-	-
		<b>2800</b>				12	355	2800	1962	984	1,35	60,36	30,12	-	-
		<b>3000</b>				12	355	3000	2050	1029	1,35	64,32	31,68	-	-
<b>11136</b>	0415	<b>1600</b>	XXXX	YYYY	-0000	14	415	1600	1487	746	1,35	42,28	22,12	-	-
		<b>1800</b>				14	415	1800	1643	824	1,35	47,32	25,06	-	<b>11136-02</b>
		<b>2000</b>				14	415	2000	1790	898	1,35	52,22	28,14	-	<b>11136-01</b>
		<b>2200</b>				14	415	2200	1928	967	1,35	56,84	29,82	-	-
		<b>2400</b>				14	415	2400	2057	1032	1,35	61,32	31,64	-	-
		<b>2600</b>				14	415	2600	2177	1092	1,35	65,94	33,46	-	-
		<b>2800</b>				14	415	2800	2289	1149	1,35	70,42	35,14	-	-
		<b>3000</b>				14	415	3000	2392	1200	1,35	75,04	36,96	-	-
<b>11136</b>	0475	<b>1600</b>	XXXX	YYYY	-0000	16	475	1600	1700	853	1,35	48,32	25,28	-	-
		<b>1800</b>				16	475	1800	1878	942	1,35	54,08	28,64	-	-
		<b>2000</b>				16	475	2000	2046	1027	1,35	59,68	32,16	-	-
		<b>2200</b>				16	475	2200	2203	1105	1,35	64,96	34,08	-	-
		<b>2400</b>				16	475	2400	2351	1180	1,35	70,08	36,16	-	-
		<b>2600</b>				16	475	2600	2488	1248	1,35	75,36	38,24	-	-
		<b>2800</b>				16	475	2800	2616	1313	1,35	80,48	40,16	-	-
		<b>3000</b>				16	475	3000	2734	1372	1,35	85,76	42,24	-	-
<b>11136</b>	0535	<b>1600</b>	XXXX	YYYY	-0000	18	535	1600	1912	959	1,35	54,36	28,44	-	-
		<b>1800</b>				18	535	1800	2113	1060	1,35	60,84	32,22	-	<b>11136-03</b>
		<b>2000</b>				18	535	2000	2301	1155	1,35	67,14	36,18	-	<b>11136-07</b>
		<b>2200</b>				18	535	2200	2479	1244	1,35	73,08	38,34	-	-
		<b>2400</b>				18	535	2400	2644	1327	1,35	78,84	40,68	-	-
		<b>2600</b>				18	535	2600	2799	1404	1,35	84,78	43,02	-	-
		<b>2800</b>				18	535	2800	2942	1476	1,35	90,54	45,18	-	-
		<b>3000</b>				18	535	3000	3075	1543	1,35	96,48	47,52	-	-

CE 05 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)


# CARRÉ VERTICAL (CPVN2-ZB)



CPVN2-ZB

## HOW TO ORDER CARRÉ VERTICAL

Delivery time 15 - 30 working days  
(transport duration not included)

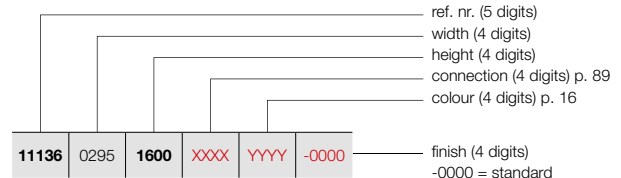


## FREE-STANDING INSTALLATION (CPVN2-ZB)

See p. 88 for additional accessories.

## HOW TO ORDER STOCK RADIATOR CARRÉ VERTICAL

Delivery time 5 working days  
(transport duration not included)



REFERENCE CODE CUSTOM MADE CARRÉ VERTICAL						TECHNICAL DATA					short ref. nr.				
REF. NR.	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	short ref. nr. RAL 9016 stock						
REF. NR. CARRÉ VERTICAL CPVN2-ZB : 11136															
11136	0595	1600	XXXX	YYYY	-0000	20	595	1600	2125	1066	1,35	60,40	31,60	-	-
		1800				20	595	1800	2348	1178	1,35	67,60	35,80	-	11136-04
		2000				20	595	2000	2557	1283	1,35	74,60	40,20	-	11136-05
		2200				20	595	2200	2754	1382	1,35	81,20	42,60	-	-
		2400				20	595	2400	2938	1474	1,35	87,60	45,20	-	-
		2600				20	595	2600	3110	1561	1,35	94,20	47,80	-	-
		2800				20	595	2800	3269	1640	1,35	100,60	50,20	-	-
		3000				20	595	3000	3417	1715	1,35	107,20	52,80	-	-
11136	0655	1600	XXXX	YYYY	-0000	22	655	1600	2337	1173	1,35	66,44	34,76	-	-
		1800				22	655	1800	2582	1296	1,35	74,36	39,38	-	-
		2000				22	655	2000	2812	1411	1,35	82,06	44,22	-	11136-13
		2200				22	655	2200	3029	1520	1,35	89,32	46,86	-	-
		2400				22	655	2400	3232	1622	1,35	96,36	49,72	-	-
		2600				22	655	2600	3421	1717	1,35	103,62	52,58	-	-
		2800				22	655	2800	3596	1804	1,35	110,66	55,22	-	-
		3000				22	655	3000	3759	1886	1,35	117,92	58,08	-	-
11136	0715	1600	XXXX	YYYY	-0000	24	715	1600	2550	1280	1,35	72,48	37,92	-	-
		1800				24	715	1800	2817	1413	1,35	81,12	42,96	-	-
		2000				24	715	2000	3069	1540	1,35	89,52	48,24	-	-
		2200				24	715	2200	3305	1658	1,35	97,44	51,12	-	-
		2400				24	715	2400	3526	1769	1,35	105,12	54,24	-	-
		2600				24	715	2600	3732	1873	1,35	113,04	57,36	-	-
		2800				24	715	2800	3923	1968	1,35	120,72	60,24	-	-
		3000				24	715	3000	4101	2058	1,35	128,64	63,36	-	-
11136	0775	1600	XXXX	YYYY	-0000	26	775	1600	2762	1386	1,35	78,52	41,08	-	-
		1800				26	775	1800	3052	1531	1,35	87,88	46,54	-	-
		2000				26	775	2000	3324	1668	1,35	96,98	52,26	-	-
		2200				26	775	2200	3580	1796	1,35	105,56	55,38	-	-
		2400				26	775	2400	3820	1917	1,35	113,88	58,76	-	-
		2600				26	775	2600	4043	2029	1,35	122,46	62,14	-	-
		2800				26	775	2800	4250	2133	1,35	130,78	65,26	-	-
		3000				26	775	3000	4442	2229	1,35	139,36	68,64	-	-
11136	0895	1600	XXXX	YYYY	-0000	30	895	1600	3187	1599	1,35	90,60	47,40	-	-
		1800				30	895	1800	3521	1767	1,35	101,40	53,70	-	-
		2000				30	895	2000	3836	1925	1,35	111,90	60,30	-	11136-19
		2200				30	895	2200	4131	2073	1,35	121,80	63,90	-	-
		2400				30	895	2400	4407	2211	1,35	131,40	67,80	-	-
		2600				30	895	2600	4665	2341	1,35	141,30	71,70	-	-

CE in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)