

NIVA VERTICAL STAINLESS STEEL (N1L1-ES, N2L1-ES)

TYPES

- Single (N1L1-ES) and double (N2L1-ES)

COLOURS

- Stainless steel type 316L, matt brushed with grain 360

SPECIAL

- The Niva Vertical Stainless Steel is available with a front plate in stainless steel (this means steel plate radiator + front plate in stainless steel).
- The Niva Vertical Stainless Steel is standard delivered with a maintenance product for stainless steel.
- This maintenance product can not be delivered subsequently by Vasco.

BRACKETS

- Wall brackets in the colour RAL 7016 (anthracite grey) standard. Also in option available in the colour S600 (see p. 62).

TECHNICAL

- Electrically welded by means of resistance welding robots (invisible weld seams)
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 66

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve



VASCO

STEEL RADIATORS

RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 65



ref. nr. 118210300009993
Fittings, see p. 313

RECOMMENDED FOR THE BATHROOM IN OPTION



towel rail (stainless steel)
N1L1-ES ref. nr. 118321400009993 (520 mm)
N2L1-ES ref. nr. 118321900009993 (520 mm)

Other accessories, see p. 63

ABOUT NIVA VERTICAL STAINLESS STEEL

Pure class in all its glory

The Niva Vertical Stainless Steel combines steel plate construction with a stainless steel front plate which gives it a pure and clean design and its floating appearance gives the Niva 'extra shine'. The Niva Vertical Stainless Steel designer radiator is also available with an organically integrated stainless steel towel rail (optional).



NIVA VERTICAL STAINLESS STEEL (N1L1-ES, N2L1-ES)

HOW TO ORDER NIVA VERTICAL STAINLESS STEEL


Delivery time 15 - 30 working days
(transport duration not included)



N1L1-ES



N2L1-ES

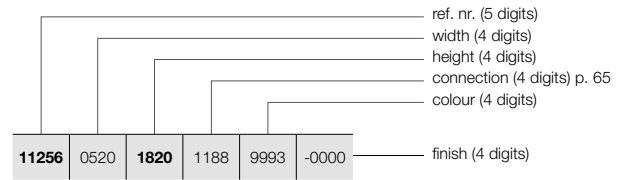

REFERENCE CODE CUSTOM MADE NIVA VERTICAL STAINLESS STEEL	TECHNICAL DATA										short ref. nr. stainless steel stock				
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)						
REF. NR. VERTICAL STAINLESS STEEL N1L1-ES : 11256															
11256	0520	1820	1188	9993	-0000	-	520	1820	1128	587	1,28	33,67	4,61	-	-
		2020				-	520	2020	1257	654	1,28	37,12	5,05	-	-
11256	0620	1820	1188	9993	-0000	-	620	1820	1322	687	1,28	39,98	5,52	-	-
		2020				-	620	2020	1490	775	1,28	44,03	6,10	-	-
REF. NR. VERTICAL STAINLESS STEEL N2L1-ES : 11257															
11257	0520	1820	1188	9993	-0000	-	520	1820	1633	836	1,31	51,68	9,07	-	-
		2020				-	520	2020	1764	903	1,31	57,23	10,00	-	-
11257	0620	1820	1188	9993	-0000	-	620	1820	1935	991	1,31	61,14	10,86	-	-
		2020				-	620	2020	2091	1071	1,31	67,72	12,00	-	-

CE in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)