ONI (O-P, O-NP)

TYPES
- O-P: with one (1400 mm) or two (1800/2000 mm) cut-outs for hanging towels
- O-NP: without cut-outs

COLOURS
- Standard colour S600 (fine texture white) (RAL 9016: no extra charge 15%)
- Extensive colour chart see p. 10

SPECIAL
- A copper heating tube is integrated into the ultra-thin aluminium front plate.

BRACKETS
- Wall brackets standard

TECHNICAL
- The pathway for the heating tube is milled out to 2 mm below the surface. The tube is then pressed into the aluminium plate.
- KTL priming coat, powder coating
- Standard operating pressure: 6 bar
- Maximum operating temperature: 120°C

ELECTRICAL(available versions: see chapter electrical radiators)

✔ Pure electrical radiator prefilled

✘ Mixed radiator

TECHNICAL DRAWINGS
- See p. 40

CONNECTION

✘ One-point connection for one-pipe system

✘ One-point connection for two-pipe system

✔ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 342)

✔ Two-point connection for two-pipe system (standard) (see p. 342)

✘ Integrated valve

- Connections: ½" (inner thread)

ONI

Simplicity and efficiency
combined in the absolute essence, free of any superfluity

The timeless Oni combines clean and sober design with unsurpassed user-friendliness. With its gently rounded corners and slender heating surface, it elicits admiration in every interior. The Oni is available in virtually all Vasco colours and thus easily matches every setting.

RECOMMENDED CONNECTION (0066)



Other connection methods, see p. 39



ref. nr. 118210300000099

RECOMMENDED FOR BATHROOM AND KITCHEN (O-NP)
IN OPTION

towel rail MULTI+ right (S600)

towel rail MULTI+ right (M301)

towel rail MULTI+ right (RAL 9005)

ONI (O-P, O-NP)

HOW TO ORDER ONI
Delivery time 15 - 30 working days
(transport duration not included)

11311	0500	1400	0066	YYYY	-0000

- ref. nr. (5 digits)
- width (4 digits)
- height (4 digits)
- connection (4 digits)
- colour (4 digits) p. 10
- version (4 digits)

O-P

O-NP

HOW TO ORDER STOCK RADIATOR ONI
Delivery time 5 working days
(transport duration not included)

11311	-00

- ref. nr. (5 digits)
- see table below

PRODUCT GROUP: BATHROOM

VASCO

REFERENCE CODE CUSTOM MADE ONI						tubes	width (L mm)	height (H mm)	75/65/20 (Watt) (φ50K)	55/45/20 (Watt) (φ30K)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. ONI O-P : 11311														
11311	0500	1400	0066	YYYY	-0000	-	500	1400	573	307	1,22	16,30	0,35	-
		1800				-	500	1800	795	420	1,25	20,85	0,45	-
		2000				-	500	2000	815	430	1,25	22,95	0,60	-
REF. NR. ONI O-NP : 11312														
11312	0500	1400	0066	YYYY	-0000	-	500	1400	573	307	1,22	16,30	0,35	-
		1800				-	500	1800	795	420	1,25	20,85	0,45	-
		2000				-	500	2000	815	430	1,25	22,95	0,60	-

In conformity with EN442-1: 2014: radiators and convectors
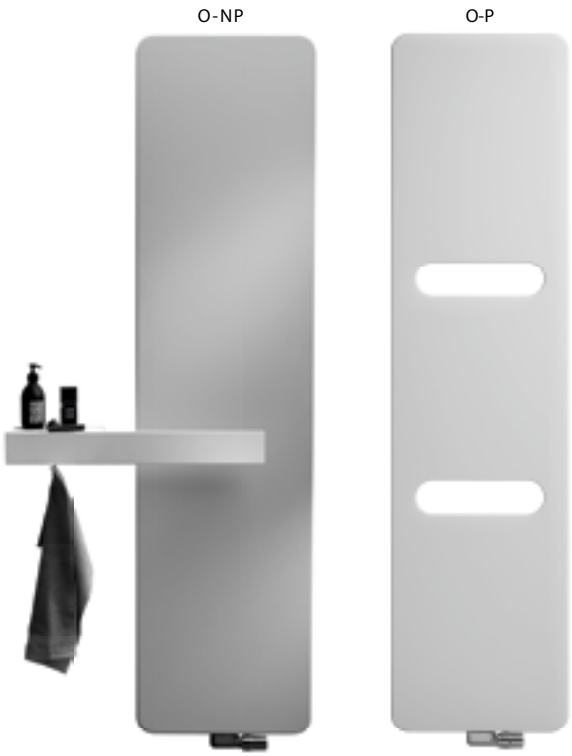
* RAL 9016: no extra charge 15%